


Opakowania płaskie								
Model Vario	60	80	100	115	120	145	165	200
zakres wymiarów (mm)								
min-max (W)	100-600	100-800	100-1000	100-1150	100-1200	100-1450	100-1650	100-2000
min-max (L)	75-800	75-900	75-1100	75-1200	75-1400	100-1500	100-1800	100-1800
min-max (a)	30-800	30-900	30-1100	30-1200	30-1400	30-1500	30-1800	30-1800
min (b)	50	50	50	50	50	50	50	50
min $x/x1$	0/35	0/35	0/35	0/35	0/35	0/35	0/35	0/35
min $x/x1^*$	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0

Podane formaty uzależnione są od konfiguracji i wyposażenia maszyny

\* Opcja

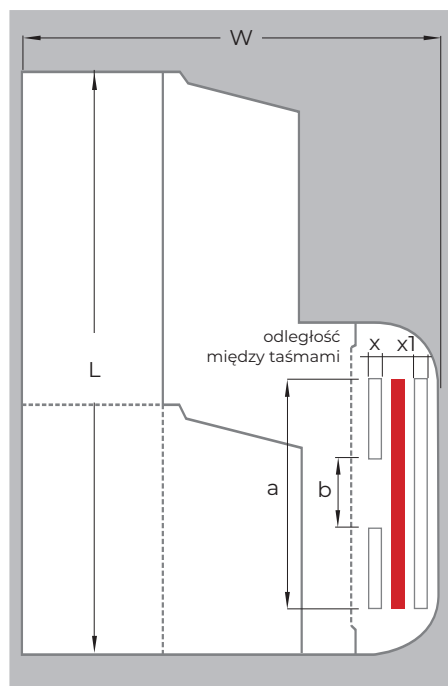

Opakowania Sklejone								
Model Vario	60	80	100	115	120	145	165	200
zakres wymiarów (mm)								
min-max (W)	100-600	100-800	100-1000	100-1150	100-1200	100-1450	100-1650	100-2000
min-max (L)	75-800	75-900	75-1100	75-1200	75-1400	100-1500	100-1800	100-1800
min-max (a)	30-800	30-900	30-1100	30-1200	30-1400	30-1500	30-1800	30-1800
min (b)	50	50	50	50	50	50	50	50
min $x/x1$	0/35	0/35	0/35	0/35	0/35	0/35	0/35	0/35
min $x/x1^*$	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0

Podane formaty uzależnione są od konfiguracji i wyposażenia maszyny

\* Opcja

Model Vario	60	80	100	115	120	145	165	200
Materiał								
Tektura lita od	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>	120-2000 g/m <sup>3</sup>
Rodzaje tektur falistych	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF	A,B,C,E,F,N,BE,BF,EF
Grubość innego materiału	42	42	42	42	42	42	42	42
Podstawowe dane techniczne								
Napięcie	400	400	400	400	400	400	400	400
Motor Power* (kW)	10-22	10-22	10-22	10-22	10-22	10-22	10-22	10-22
Prędkość standardowa	20-200 m/min	20-200 m/min	20-200 m/min	20-200 m/min	20-200 m/min	20-200 m/min	20-200 m/min	20-200 m/min
Długość maszyny* (m)	7-16	7-16	7-16	7-16	7-16	7-16	7-16	7-16
Waga* (t)	5-11	5-11	5-12	5-12	5-12,5	5-13	6-13	6-14

\* parametry zależne od konfiguracji maszyny